

13464

2021 GENESIS GV80



08/17/2020

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 6,000 LBS. TRAILER WEIGHT & 600 LBS. TONGUE WEIGHT.

**WARNING: *** DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY *****FOR MORE INFORMATION LOG ONTO WWW.CURTMFG.COM
HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-877-287-8634

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	8	10-10277	HHCS,M12x1.25,40,CL10.9,YZ
2	8	30-00149	WASHER, S-CON,1/2,YZ

TOOLS REQUIRED
RACHET
TORQUE WRENCH
SOCKET, 19mm
SOCKET, 10mm
EXTENSION, 6"
SAFETY GLASSES

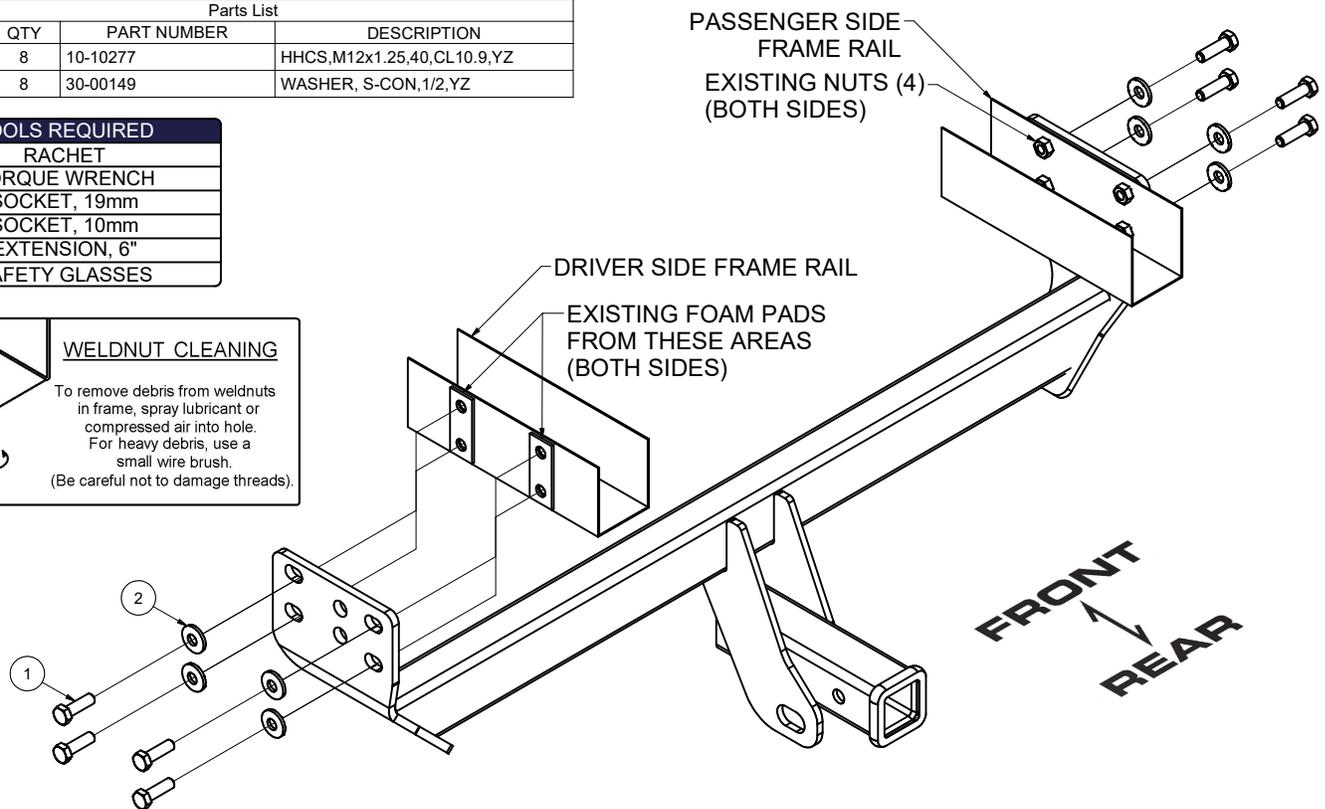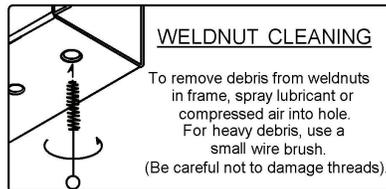

HITCH WEIGHT: 47 LBS.



INSTALL TIME

PROFESSIONAL: 30 MINUTES

NOVICE (DIY): 65 MINUTES

INSTALL NOTES:

- NO DRILLING REQUIRED
- TEMPORARILY LOWER EXHAUST
- TEMPORARILY REMOVE BEZEL

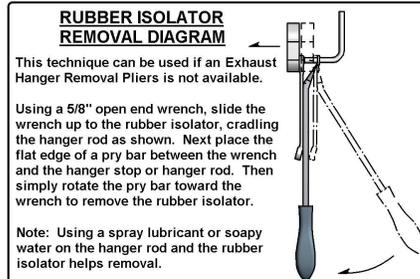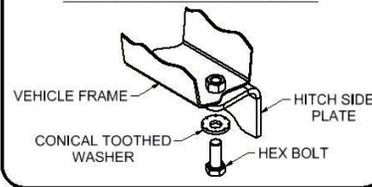**CONICAL TOOTHED WASHER ORIENTATION DIAGRAM****INSTALLATION STEPS**

1. Remove bottom exhaust bezel by removing (2) nuts on both sides. Set aside for reinstallation in STEP 5.
2. Lower muffler by removing the (4) exhaust hanger rods from the rubber isolator and gently pull the bumper cover rearward where the exhaust tips are located on the driver and passenger side. Use stand to support and prevent from damaging muffler.
Note: (2) exhaust hangers rods are located on both sides of the muffler and (2) exhaust hanger rods are located on the exhaust pipes near the differential.
3. Remove (2) existing foam pads on the vehicle frame on each side.
4. Raise the hitch into position by loosely installing the provided (4) M12 hex bolts with conical-toothed washers into (4) weld nuts on both sides. Torque all M12 bolts to 86 ft-lbs.
5. Reinstall the muffler, bezel, and nuts removed in STEPS 1-2.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Scan
for more
information

CURT Manufacturing LLC., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, CURT Manufacturing LLC., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. CURT Manufacturing LLC.'s liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.

This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New York, V.E.S.C.Regulation V-5 and SAE J684.