


HUSKY **Weather** **BEATER**[™] **Custom Vehicle Floor Protection**

CARE AND USE INSTRUCTIONS

Thank you for selecting a WeatherBeater[™] Floor Liner from Winfield Consumer Products. Your new third seat liner is custom molded to fit your vehicle with 2nd row bench & bucket seating. The liner is made to take the place of your factory floor mats. **For correct fit, it is necessary to remove the factory floor mats before installing your new floor liner.** However, do not remove the factory-installed carpeting.


Your liner is made from an engineering resin that is lightweight and extremely tough and durable. The easiest way to clean your liner is with a damp cloth or sponge. If using a cleaner, 409[®] or Glass Plus[®] work well. Use of Armor All[®], Son-of-a-Gun[®] or similar items is discouraged as these products make the liner slick.

INSTALLATION INSTRUCTIONS FOR YOUR FORD EXPEDITION & LINCOLN NAVIGATOR THIRD SEAT FLOOR LINER

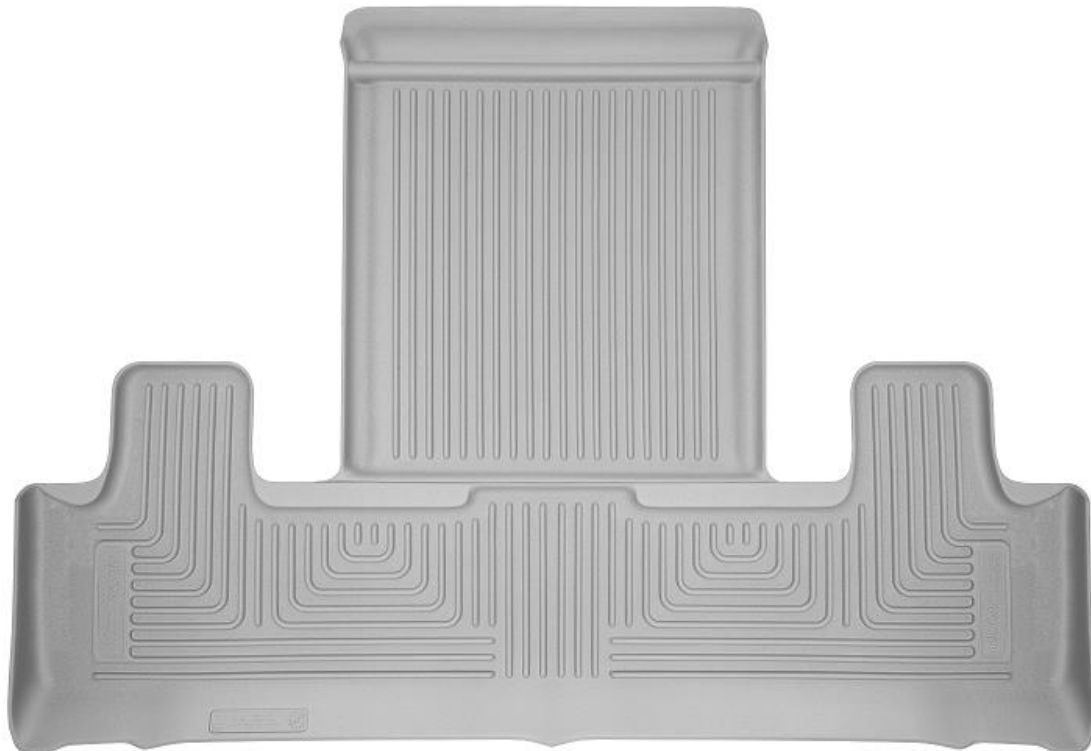

MODELS WITH 2ND ROW BUCKETS AND WITHOUT 2ND ROW ROW CONSOLE: TO INSTALL YOUR LINER, FLIP FORWARD/SLIDE THE 2ND ROW SEATS TO EXPOSE THE 3RD ROW FLOOR PANS. NEXT, INSTALL YOUR LINER, POSITIONING IT AS SHOWN ABOVE. LASTLY, REPOSITION THE 2ND ROW SEATS. NOTE THAT THE TONGUE OF THE LINER EXTENDS BETWEEN THE 2ND ROW BUCKET SEATS. THE FRONT EDGE OF THE 3RD SEAT LINER TUCKS UNDER THE REAR WALL OF THE 2ND SEAT LINER.

FOR MODELS WITH 2ND ROW BUCKETS/AND 2ND ROW CONSOLE OR MODELS WITH 2ND ROW BENCH SEATS: PLEASE SEE THE INSTRUCTIONS ON THE BACK SIDE OF THIS PAGE.

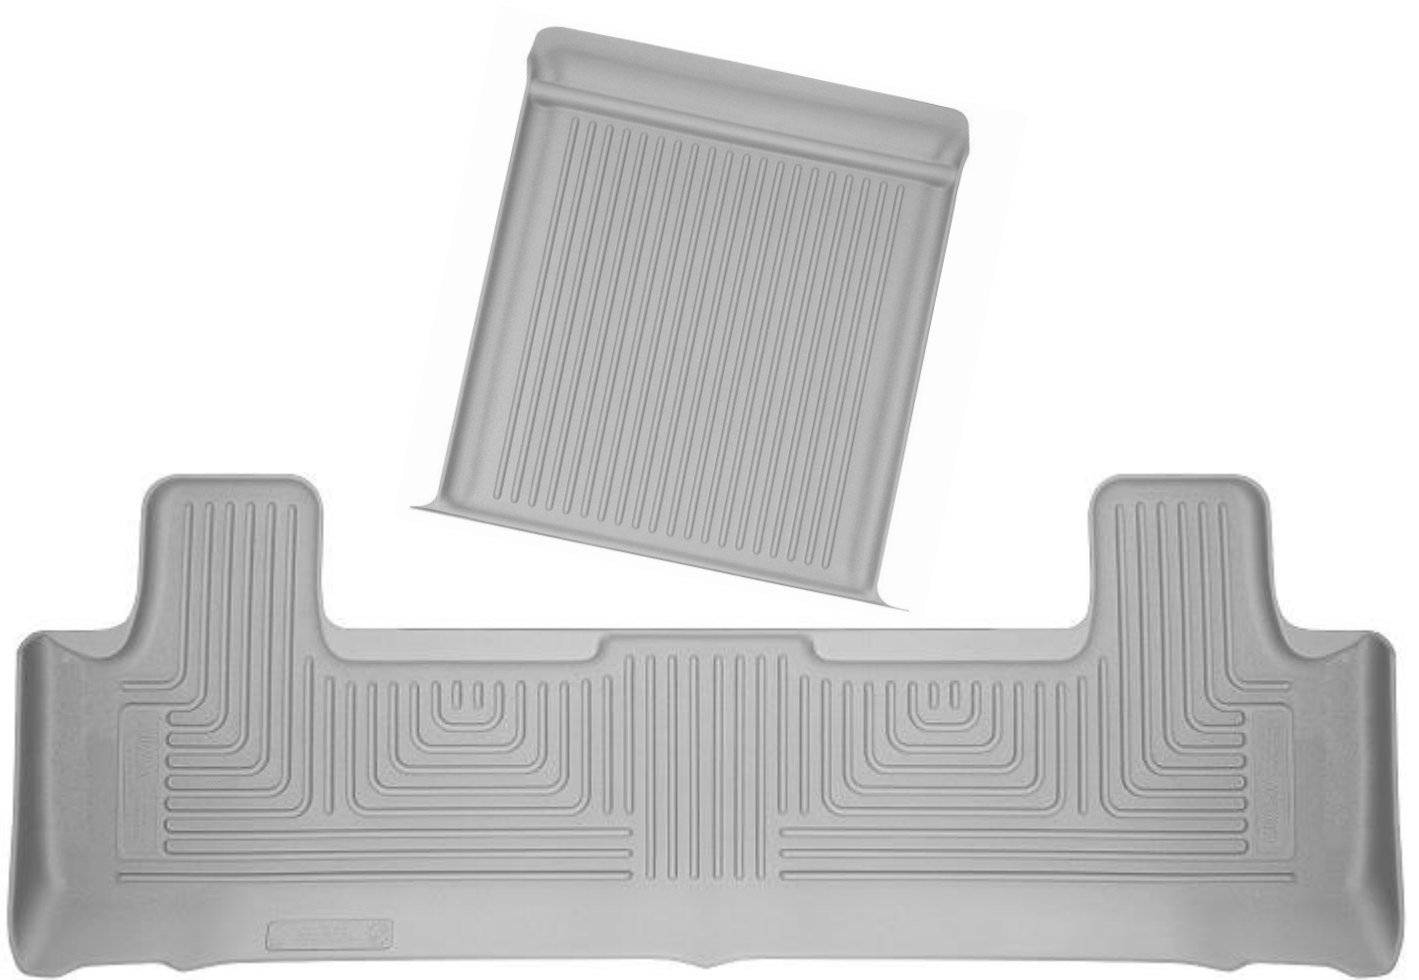

MODELS WITH 2ND ROW BUCKETS THAT INCLUDE A CONSOLE BETWEEN THE BUCKET SEAT AND AND MODELS WITH 2ND ROW BENCH SEATS: PRIOR TO INSTALLATION OF YOUR LINER YOU WILL NEED TO TRIM AWAY THE TONGUE SECTION OF THE LINER. A MOLDED IN TRIM GROOVE GUIDES THE TRIM SEE (IMAGE BELOW). WITH THE LINER TRIMMED, FLIP FORWARD/SLIDE THE 2ND ROW SEATS TO EXPOSE THE 3RD ROW FLOOR. NEXT, INSTALL YOUR LINER, POSITIONING IT AS SHOWN ABOVE. LASTLY, REPOSITION THE 2ND ROW SEATS.

