



**INSTALLATION INSTRUCTIONS**  
**Grill Guard # 2059/2059-2**  
**2007 Toyota FJ Cruiser**

**PART LIST**

1	Grill Guard
2	Lower Bracket ( Driver and Passenger)
2	Middle Bracket ( Drive and Passenger)
2	Top Bracket (Drive and Passenger)
4	7/16 x 1 ¼ Hex Head Bolt
4	7/16 Hex Nyloc Nut
8	7/16 Flat Washer
4	5/16 x 1 Hex Head Bolt
4	5/16 Flat Washer
2	3/8 x 1 Button Head Bolt
2	3/8 Hex Nyloc Nut
2	3/8 Flat Washer
4	M6 x 1.0 x 25 Hex Head Bolt
4	M6 Flat Washer
4	3/8-16x 4 ½ Hex Head Bolt
4	3/8 Hex Nyloc Nut
8	3/8 Flat Washer

**PROCEDURE:**

1. Remove contents from box and check for damage. Verify all parts are present. Read instructions carefully.
2. Locate frame mount for lower bracket (Driver side shown, See Fig #1). Insert (2) 3/8 x 4 ½ Hex Head bolt, (2) 3/8 Flat washer as shown (See Fig #2). Install lower bracket using (2) 3/8 Hex nyloc nut, (2) 3/8 Flat washer, leave loose (See Fig #3).
3. Repeat procedure #2 on opposite side

4. Install middle bracket onto radiator support (Driver and Passenger) using (4) M6 x 1.0 x 25mm Hex head bolt, (4) M6 Flat washer and tighten. ( Driver Side shown, see Fig #5)
5. Insert top bracket in between bumper and grill (See Fig #6) Align and install top bracket onto middle bracket using (2) 5/16 Hex head bolt, (2) 5/16 Flat washer. Leave Loose ( Driver side shown, see Fig #7)
6. Repeat procedure #7 on opposite side.
7. Install (1) Grill Guard onto vehicle starting with lower brackets, using (4) 7/16 x 1 ¼ Hex head bolts, (4) 7/16 Hex Nyloc Nut, (8) 7/16 Flat washer, then using (2) 3/8 x 1 button head bolts, (2) 3/8 Hex Nyloc nut, (2) 3/8 flat washer onto top brackets. Leave Loose ( See Fig #8)
8. Level and adjust grill guard and desired then tighten.


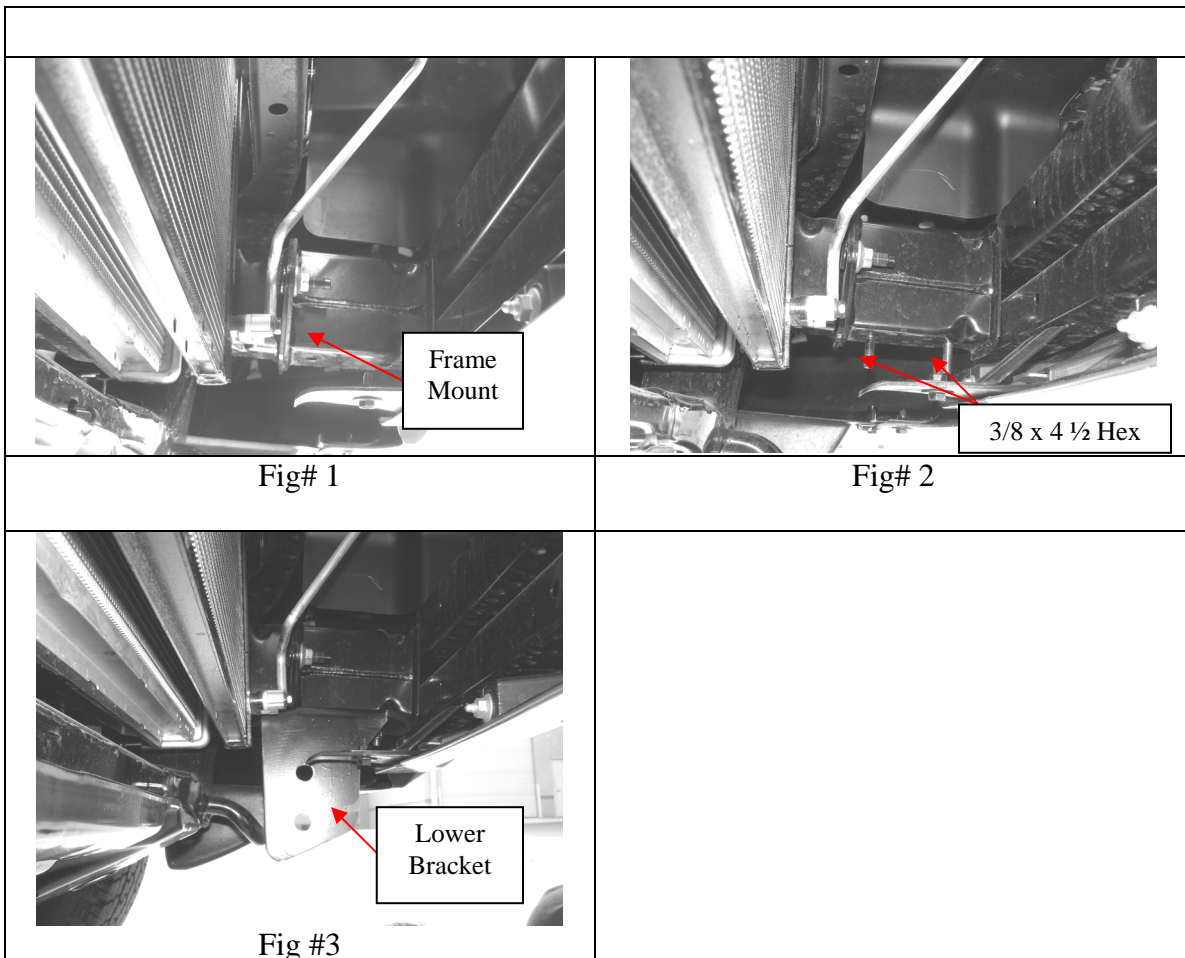





Fig #5



Fig#6

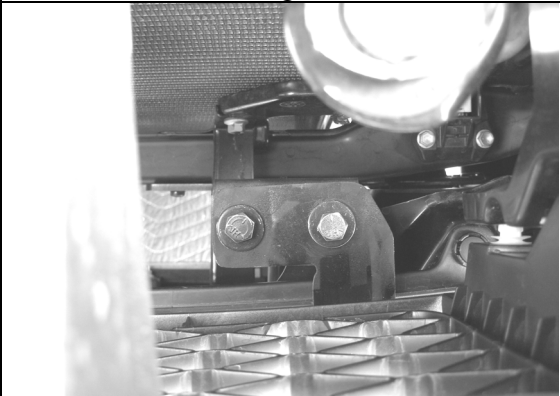

Fig# 7

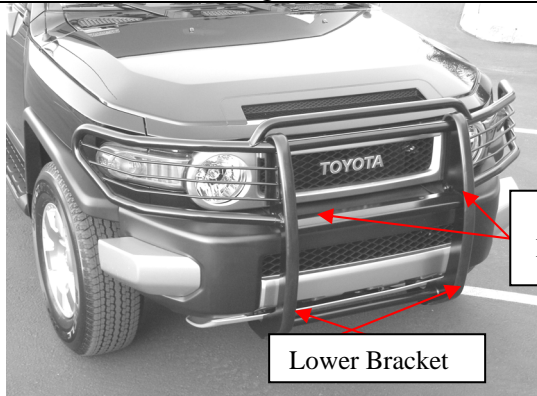

Fig# 8

Top Brackets

Lower Bracket