



## Trailer Coupler User Guide



**CONTRACTOR**

TORSION  FLEX






# Torsion Hitch USERS GUIDE

This product is protected by Patent # US9505281B1, USD773345S1, USD9868327B1



SCAN ME!

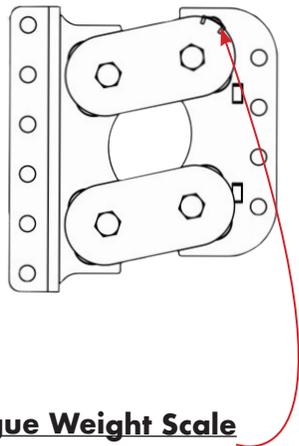


## Tongue Weight Scale



← Max tongue weight

← Min tongue weight

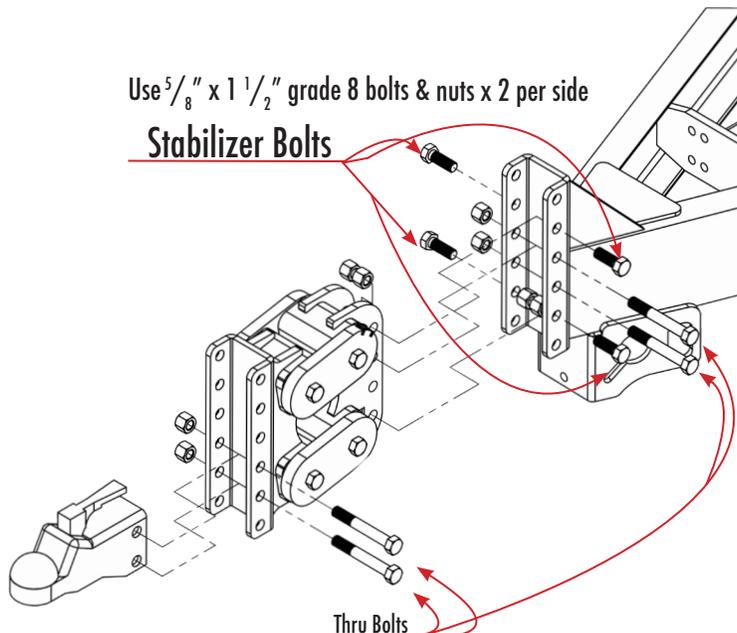

Use  $\frac{5}{8}$ " x  $1\frac{1}{2}$ " grade 8 bolts & nuts x 2 per side

Stabilizer Bolts

Thru Bolts

Use  $\frac{5}{8}$ " x  $1\frac{1}{2}$ " grade 8 bolts & nuts x 2 per side

Must have mounting bolts torqued to 120 Ft. lbs.

**AVERAGE BREAK-IN PERIOD: 500 MILES.**

\* GEN-Y Hitch shall NOT be held responsible for any or all "compatible parts or products" being used for towing with or around GEN-Y Hitch.

\* GEN-Y Hitch products shall never be altered in any circumstances and will void any or all warranties if done so.