

I-SHEET NUMBER: INST-00016

PART NUMBER: GFT07CC-TX GFT07QC-TX

PRODUCT: Growler Running Board

APPLICATION: 2007-2021 CREW MAX QUAD


CAB

HARDWARE DESCRIPTION		QTY.
HWKT-00025X		QII.
FLBW-00894	M8-1.25 X 30MM CLASS 8.8 FLANGE CAP	16
	SCREW W/WASHER	10
FLHB-00688	3/8"-16 X 1" GRADE 5 HEX SERRATED	16
	FLANGE BOLT	

PARTS INCLUDED	
Running Boards	
Rocker Panel mounting Brackets	
Threaded clamp plates	






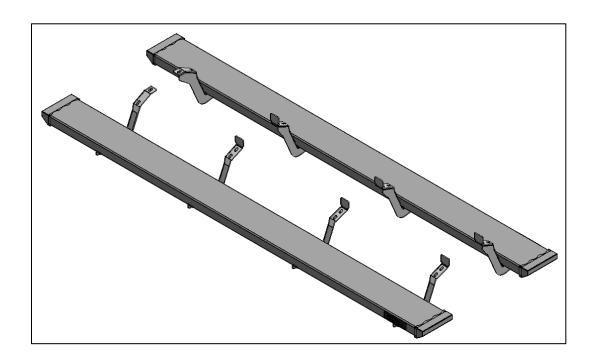


Step 1 Beginning with the driver side, remove the factory hardware and discard.

<u>Step 2</u> Next, install the four rocker panel mounting brackets with the supplied M8x25mm Hex bolts with integrated washers and leave loose.

NOTE: The brackets are labeled 1-4 from front to back.

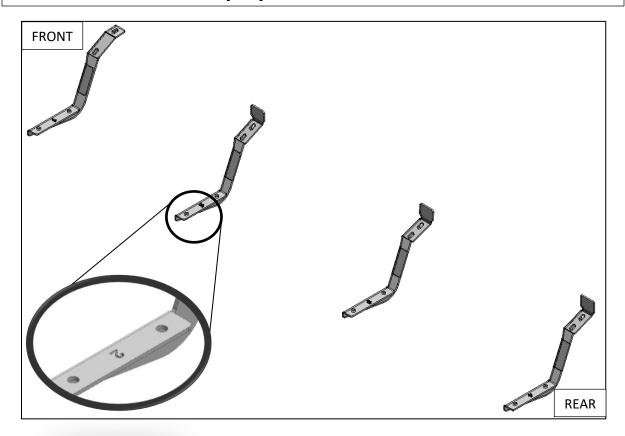

Step 3: Set running board along the top of all four brackets and center along the cab.

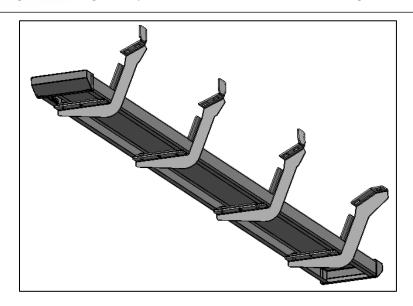



I-SHEET NUMBER: INST-00016

PART NUMBER: GFT07CC-TX GFT07QC-TX

PRODUCT: Growler Running Board

APPLICATION: 2007-2021 CREW MAX QUAD


CAB

Step 4: Insert the supplied threaded brackets (x4) inside the running board lip over the top of each bracket.

Step 5: With the supplied 3/8" x 1" hex bolts, secure each mounting location and leave loose.

Step 6: After final adjustment, tighten all running board threaded mounts.

Step 7: Next, adjust frame brackets so the running board is level with body of the vehicle and tighten all factory-mounting locations.

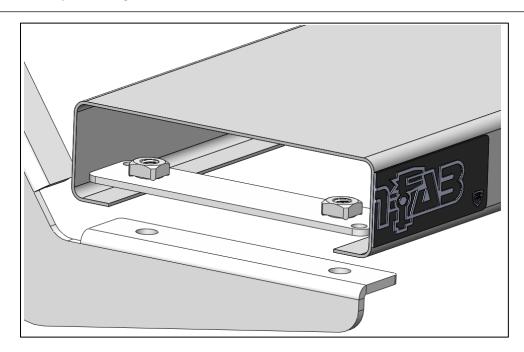

Step 8: Re-peat steps 2-7 for passenger side.